

Catalogue number: **TD160HFMU**□□ **Range**




Thermal Magnetic MCCB: 1 Pole 16A ~ 160A 50kA



**Thermal Magnetic MCCB**

- Single pole Fixed thermal magnetic MCCB
- Higher short circuit breaking capacity
- Compact Size of 35mm
- Light weight of only 0.57kg

Generic photo only (actual product may change depending on configuration)

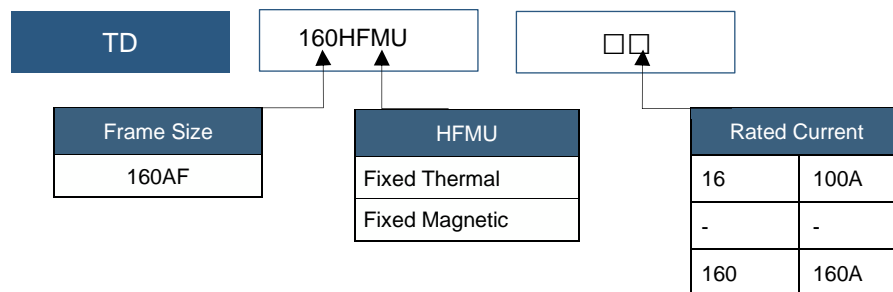

Part no.	Rated Current	Rated Short circuit Breaking Capacity
TD160HFMU16	16	50kA
TD160HFMU20	20	50kA
TD160HFMU25	25	50kA
TD160HFMU32	32	50kA
TD160HFMU40	40	50kA
TD160HFMU50	50	50kA
TD160HFMU63	63	50kA
TD160HFMU80	80	50kA
TD160HFMU100	100	50kA
TD160HFMU125	125	50kA
TD160HFMU160	160	50kA

Specification			
Manufacturer		LS Electric	
Product Range		MCCB	
Application		Single Pole Circuit Breaker	
Rated current		A	16-160
No. of poles		1	
Rated operational voltage, Ue	AC	V	240
	DC	V	250
Rated impulse withstand voltage, Uimp		Kv	8
Rated insulation voltage, Ui		V	1000
Rated ultimate short-circuit breaking capacity, Icm	AC	kA	50
	DC	kA	25
Rated short circuit making capacity Icm		220/240V kA	105
Mechanical life		25000 Operations	
Electrical life @415 V		10000 Operations	
Reference standard		IEC60947-2	

**Dimensions for TD160**

